





**Simplex Cord**

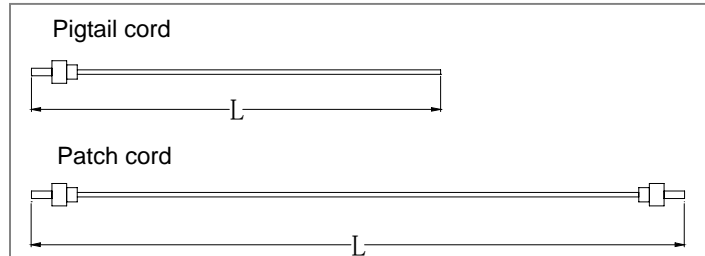

**Duplex Cord**

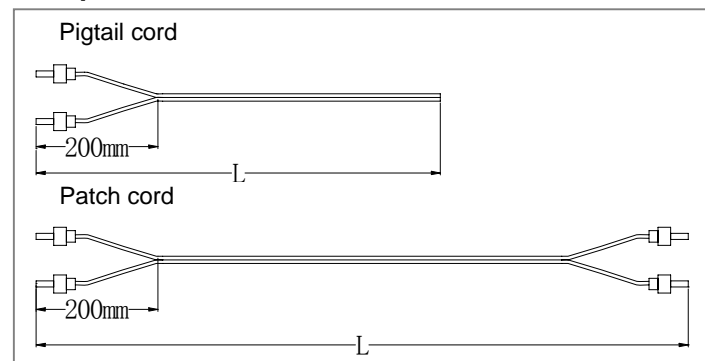

● **Technical Specification**

	Single Mode		Multi Mode
Connector	FC, SC, MU, LC	ST	FC, SC, ST, MU, LC
Cable Diameter (mm)	Φ3, Φ2, Φ0.9		
Insertion Loss (dB)	$\leq 0.3$ (PC) $\leq 0.2$ (UPC) $\leq 0.3$ (APC)	$\leq 0.3$ (PC) $\leq 0.2$ (UPC)	$\leq 0.2$ (PC)
Return Loss (dB)	$\geq 45$ (PC) $\geq 50$ (UPC) $\geq 65$ (APC)	$\geq 45$ (PC) $\geq 50$ (UPC)	----
Exchangeability	$\leq 0.2$ dB ( When randomly connected )		
Vibration	$\leq 0.2$ dB ( 5~50Hz , 1.5mm Amplitude )		
Temp. Range	$\leq 0.2$ dB ( -40°C ~ 80°C , 5 Cycles )		